

ISSN : 2301-6590



Proceedings ICETD 2012

The First International Conference in
Engineering and Technology Development



Universitas Bandar Lampung
20 - 21, June 2012
Lampung, Indonesia



PREFACE

The activities of the International Conference is in line and very appropriate with the vision and mission of the UBL to promote training and education as well as research in these areas.

On behalf of the First International Conference of Engineering and Technology Development (ICETD 2012) organizing committee; we are very pleased with the very good responses especially from the keynote speakers and from the participants. It is noteworthy to point out that about 45 technical papers were received for this conference

The participants of conference come from many well known universities, among others: Universitas Bandar Lampung, International Islamic University Malaysia, University Malaysia Trengganu, Nanyang Technological University, Curtin University of Technology Australia, University Putra Malaysia, Jamal Mohamed College India, ITB, Mercu Buana University, National University Malaysia, Surya Institute Jakarta, Diponegoro University, Unila, Universitas Malahayati, University Pelita Harapan, STIMIK Kristen Newmann, BPPT Lampung, Nurtanio University Bandung, STIMIK Tarakanita, University Sultan Ageng Tirtayasa, and Pelita Bangsa.

I would like to express my deepest gratitude to the International Advisory Board members, sponsors and also welcome to all keynote speakers and all participants. I am also grateful to all organizing committee and all of the reviewers which contribute to the high standard of the conference. Also I would like to express my deepest gratitude to the Rector which give us endless support to these activities, such that the conference can be administrated on time.

Bandar Lampung, 20 Juni 2012

Mustofa Usman, Ph.D
ICETD Chairman

PROCEEDINGS
The First International Conference in
Engineering and Technology Development
(ICETD 2012)

UNIVERSITAS BANDAR LAMPUNG
Bandar Lampung, Indonesia
June, 20-21 2012

Sterring Commite

Chairman

Mustofa Usman

Co-Chairman

Marzuki

Technical Committee

Ahmad Cucus

Agus Sukoco

Dina Ika Wahyuningsih

Treasure

Maria Shusanti Febrianti

Committee Member

Indyah Kumoro

Fritz Akhmad Nuzir

Baginda Simaimban

Berry Salatar

Harpain

Yuthsi Aprilinda

Usman Rizal

Andala Rama P. Barusman

Yanuar Dwi Prasetyo

International Advisory Board

Ahmad F. Ismail, Malaysia

Hon Wei Leong, Singapore

Mustofa Usman, Indonesia

Imad Khamis, USA

Moses L. Singih, Indonesia

Y. M. Barusman, Indonesia

Andreas Dress, Germany

Rozlan Alias, Malaysia

Faiz A.M. Elfaki, Malaysia

Rudi Irawan, Indonesia

Warsono, Indonesia

Gusri Ibrahim, Indonesia

Raihan Othman, Malaysia

Jamal I Daoud, Malaysia

Zeng Bing Zen, China

Riza Muhida, Indonesia

Tjin Swee Chuan, Singapore

Heri Riyanto, Indonesia

Khomsahrial R, Indonesia

Agus Wahyudi, Indonesia

Rony Purba, Indonesia

Lilies Widodojoko, Indonesia

Alex Tribuana S, Indonesia

Organizing Committee

Chair Person

Prof. DR. Khomsahrial Romli, M.Si

Vice Chair Person

Drs. Harpain, M.A.T., M.M

Secretary

Fritz Akhmad Nuzir, S.T., M.A

Ahmad Cucus, S.Kom., M.Kom

Treasure

Dian Agustina, S.E

Special Events

DR. Zulfi Diane Zaini, SH., MH

DR. Baginda Simaibang, M.Ed

Zainab Ompu Jainah, SH., MH

DR. Alex Tribuana S., ST., MM

Erlangga, S.Kom

Recepcionist

Berry Salatar, A.Md

Yanuar Dwi Prasetyo, S.Pd.I., M.A

Siti Rahma Wati, S.E

Ardiansyah, ST., MT

Sofie Islamia Ishar, S.T., M.T

Taqwan Thamrin, S.T., M.Sc

Transportation and Acomodation

Irawati, SE

Usman Rizal, S.T., MMSi

Hendri Dunan, S.E., M.M

Rifandi Ritonga, S.H

Desi Puspita Sari, S.E

Roby Yuli Endra, S.Kom

Tanto Lailam, S.H

Ilyas Sadad, S.T., M.T

Publication and Documentation

Ir. Indriati Agustina Gultom, M.M

Monica Mutiara Tinambunan, S.I.Kom., M.I.Kom

Noning Verawati, S.Sos

Hesti, S.H

Rifandi Ritonga, SH

Olivia Tjioener, S.E., M.M
Violita, S.I.Kom

Cosumption

Dra. Yulfriwini, M.T
Dra. Agustuti Handayani, M.M
Susilowati, ST., MT
Wiwin Susanty, S.Kom
Reni Nursyanti, S.Kom
DR.Dra. Ida Farida, M.Si

Facility and Decoration

Zainal Abidin, SE
Ahyar Saleh, SE
Eko Suhardiyanto
Dina Ika Wahyuningsih, A.Md
Wagino
Sugimin

Table Of Content

Organizing Committee.....	i
Table Of Content.....	v
Keynote Speaker	
1. Zinc-Air Battery – Powering Electric Vehicles to Smart Active Labels Dr. Raihan Othman	1
2. Enhancing Heat Transfer Using Nanofluids(abstract) Prof. Ahmad Faris Ismail	6
3. Rapid Prototyping and Evaluation for Green Manufacturing RizaMuhida, Ph.D	7
4. Indonesia’s Challenge to Combat Climate Change Using Clean Energy Rudi Irawan, Ph.D	12
5. Paraboloid-Ellipsoid Programming Problem Prof.Dr. Ismail Bin Mohd	15
6. Model Development of Children Under Mortality Rate With Group Method of Data Handling Dr. IingLukman	27
7. The Modified CW1 Algorithm For The Degree Restricted Minimum Spanning Tree Problem Wamiliana, Ph.D	36
8. The Fibre Optic Sensor in Biomedical Engineering and Biophotonics Prof. TjinSweeChuan	
Speaker	
1. Web-Based Service Optimization with JSON-RPC Platform in Java and PHP WachyuHari Haji	1
2. Trouble Ticketing System Based Standard ISO10002: 2004 To Improve Handling of Complaints Responsibility Ahmad Cucus, Marzuki, AgusSukoco, Maria ShusantiFebrianti, Huda Budi Pamungkas	6
3. Design of Warehouse Management Application Tool for Controlling The Supply Chain Anita Ratnasari, Edi Kartawijaya	10
4. Development Of Decision Related Engine Using Integration Of Genetic Algorithm And Text Mining EvianaTjaturPutri, Mardalena, Asmah	15
5. Implementing CBR on The College Rankings Based on Webometrics with EPSBED’s Data and Webometrics Knowledge	

	Marzuki , Maria Shusanti F, Ahmad Cucus , AgusSukoco	19
6.	Paypal Analysis as e-Payment in The e-Business Development Nomi Br Sinulingga	24
7.	Decision Support System for Determination of Employees Using Fuzzy Decision Tree Sinawaty#1, YusniAmaliah	28
8.	Analysis of Factors Influencing Consumer Behavior Bring Their Own Shopping Bag (Case Study Kecamatan Tembalang) Aries Susanty, DyahIkaRinawati, FairuzZakiah	33
9.	The Use of Edge Coloring Concept for Solving The Time Schedule Problem at Senior High School (Case Study at SMAN 9 Bandarlampung) RahmanIndraKesuma, Wamiliana, MachudorYusman	41
10.	Analysis Of Web-Education Based on ISO / IEC 9126-4 For The Measurement Of Quality Of Use Marzuki, AgusSukoco, Ahmad Cucus, Maria ShusantiFebrianti, Lisa Devilia	46
11.	The Used of Video Tracking for Developing a Simple Virtual Boxing David HabsaraHareva, Martin	55
12.	M-Government as Solutions for E-Government problems in Indonesia Ahmad Cucus, Marzuki, AgusSukoco, Maria ShusantiFebrianti	60
13.	Open Source ERP for SME Tristiyanto	65
14.	Improvement in Performance of WLAN 802.11e Using Genetic Fuzzy Admission Control SetiyoBudiyanto	70
15.	Cloud Computing: Current and Future TaqwanThamrin, Marzuki, Reni Nursyanti, Andala Rama Putra	75
16.	Implementing Information Technology, Information System And Its Application In Making The Blue Print for The One Stop Permission Services Sri AgustinaRumapea, HumuntalRumapea	80
17.	Integration System Of Web Based And SMS Gateway For Information System Of Tracer Study EndykNoviyantono, Aidil	86
18.	Fuzzy Logic Applied To Intelligent Traffic Light EndykNoviyantono, Muhammad	93
19.	Solving and Modeling Ken-ken Puzzleby Using Hybrid Genetics Algorithm Olivia Johanna, Samuel Lukas, Kie Van IvankySaputra	98
20.	GIS Habitat Based Models Spatial Analysis to Determine The Suitability Of Habitat For Elephants AgusSukoco	103

21. The Course Management System Workflow-Oriented to Control Admission and Academic Process Usman Rizal, YuthsiAprilinda	108
22. Fuzzy Graphs With Equal Fuzzy Domination And Independent Domination Numbers A.Nagoorgani, P. Vijayalakshmi	115
23. Solving Pixel Puzzle Using Rule-Based Techniques and Best First Search Dina Stefani, Arnold Aribowo, Kie Van IvankySaputra, Samuel Lukas	118
24. Capacity Needs for Public Safety Communication Use 700 MHz as Common Frequencyin Greater Jakarta Area SetiyoBudiyanto	125
25. Impact of Implementation Information Technology on Accounting Sarjito Surya	132
26. Document Management System Based on Paperless WiwinSusanty, TaqwanThamrin, Erlangga, Ahmad Cucus	135
27. Traceability Part For Meter A14C5 In PT Mecoindo Of The Measurement Of Quality Of Use Suratman, WahyuHadiKristanto, AsepSuprianto, MuhamadFatchan, DendyPramudito	139
28. Designing and Planning Tourism Park with Environment and Quality Vision and Information Technology-Based(Case Study: Natural Tourism Park Raman Dam) Fritz A. Nuzir, AgusSukoco, Alex T	149
29. Smart House Development Based On Microcontroller AVR-ATMEGA328 Haryansyah, Fitriansyah Ahmad, Hadriansa	157
30. Analyze The Characteristic of Rainfall and Intensity Duration Frequency (IDF) Curve at Lampung Province Susilowati	161
31. The Research of Four Sugarcane Variety (<i>Saccharum officinarum</i>) as The Raw Materials of Bioethanol Production in Negara Bumi Ilir Lampung M.C.Tri Atmodjo, Agus Eko T, Sigit Setiadi, Nurul Rusdi, Ngatinem JP, Rina, Melina, Agus Himawan	174
32. Design an Inverter for Residential Wind Generator Riza Muhida, Afzeri Tamsir, Rudi Irawan, Ahmad Firdaus A. Zaidi	177
33. The Research of Two Sugarcane Variety (<i>Saccharum officinarum</i>) as The Raw Materials of Bioethanol Production in Negara Bumi Ilir - Lampung M.C. Tri Atmodjo, Agus Eko T., Sigit Setiadi, Nurul Rusdi, Ngatinem JP, Rina, Melina, Agus H.	182
34. Design of Plate Cutting Machine For Cane Cutter (<i>Saccharum Oficinarum</i>) Use Asetilin Gas M,C, Tri Atmodjo, Tumpal O.R, Sigit D.Puspito	186

35.	Behaviour of Sandwiched Concrete Beam under Flexural Loading Firdaus, Rosidawani	191
36.	Diesel Particulate Matter Distribution of DI Diesel Engine Using Tire Disposal Fuel Agung Sudrajad	196
37.	Microstructure Alterations of Ti-6Al-4V ELI during Turning by Using Tungsten Carbide Inserts under Dry Cutting Condition Ibrahim, G.A. Arinal, H, Zulhanif, Haron, C.H.C	200
38.	Validation Study of Simplified Soil Mechanics Method Design with Kentledge Pile Loading Test of Bored Pile Lilies Widodojoko	204
39.	Performance Assessment Tool for Transportation Infrastructure and Urban Development for Tourism Diana Lisa	211
40.	Earthquake Resistant House Building Structure Ardiansyah	221

Behaviour of Sandwiched Concrete Beam under Flexural Loading

Firdaus^{#1}, Rosidawani^{#2}

[#] Civil Engineering, Bina Darma University
Jl A. Yani No.12 Palembang, Indonesia,

¹firdaus@mail.binadarma.ac.id, firdaus.dr@gmail.com

[#] Civil Engineering, Sriwijaya University

Jl Raya Prabumulih KM 32 Ogan Ilir, Sumatera Selatan, Indonesia

²rosidawani@gmail.com

Abstract— Beam is an structural element whose main function to carry external load in the direction perpendicular to the axis of the beam. Theoretically, it is assumed when the concrete starts to crack the tension in the concrete can be neglected. Bending moment at the cross section at the location of the crack is carried by a pair of coupled forces; compressive force happens in the compressive zone above the neutral line and the tension force happens in the tension zone below the neutral line. In this kind of flexural resposns, it seems that the middle part of the cross section in the vicinity of the neutral line does not have to carry any stress. This Fact gives the idea to combine normal concrete and light weight concrete in a sandwich structure.

The main intention of this investigation is to conduct an experimental study on the flexural behavior of three layer concrete sandwich beam. The central layer is made of light weight concrete with compressive strength of 30 MPa. The center layer is sandwiched between two outer layer made of normal concrete with compressive strength 50 MPa. The test was conducted on four beams specimens with dimensions of 2100 mm in length, 100 mm width and depth of 200 mm.

Flexural beam subjected to static and cyclic load. Observation on load-deflection curves show that flexural strength capacity is determined by the loading systems, the contact conditions of the interfaces in composite system due to the use and the material properties of connectors in the middle part of the concrete beams.

Keywords— Sandwich, Flexural, Static, Cyclic, Connector

I. INTRODUCTION

In an element of concrete structure, under bending moment, the majority of the forces only act on the top and bottom part of the cross section. Therefore, it is not efficient if the part of the cross section in the vicinity of the central line that is subjected to a relatively small force is made of the same material as the one that carries most of the load. For the part of the cross section that carry small portion of the load, light weight concrete that has relatively lower strength but has much lower density can be used. In contrast, the part of the cross section that has to support the majority of the load can be constructed using normal concrete that has relatively high strength. The combination of these two different type of concretes in a form of concrete core layer that sandwiched between two skin layers in a concrete structure is known as concrete sandwich structure.

The use of normal concrete as skin layers in a concrete due to its high strength or sometimes known as High Performance Concrete (HPC) has some advantages, which includes: High strength (>41 MPa), resistance to hostile environment, high stiffness, low thermal expansion, and small shrinkage and creep. However, several research conducted in the past show that HPC tend to be produced from heavy weight concrete that means, if implemented, the optimum design can not be achieved (Besari, at.al., 1999).

According to *ACI Manual of Concrete Practice* (1995), concrete with specific gravity less than 1840 kg per m³ can be categorized as lightweight concrete sebagai beton ringan. It is well known that aggregate take the biggest proportion in concrete mixtures. By replacing conventional aggregate by Artificial Light Weight Agregat (ALWA) the total weight of the beton and structure can be reduced which in turn will automatically reduced the dimensions of the structure. Therefore, the optimum design can be achieved.

However, lightweight concrete has its own weakness such as lower stiffness and higher brittleness in addition to high shrinkage and creep behavior. Disamping mengefisienkan increase the efficiency of the concrete layer in resisting the flexural load, secara teoritis, by considering the advantage and disadvantage of high strength concrete and light weight concrete, by combining these two concrete into what is known as composite sandwich, the two concrete are compliment each other.

The problems that often emerge in sandwiched concrete structure is bonding between the two layers of different concrete types. Therefore, it is very likely that the failure is caused by debonding. Therefore, in designing concrete sandwich structure, not only we have to understand the behavior of the individual element, but also bonds between the two concrete layers of sandwiched concrete structure. One of the main requirement for the composite sandwich to support loading is compatibility between loading and deformation. Therefore, the sandwiched concrete structure must be able to act as a monolithic composite structural element. As has been mentioned before, this is determined by bonding between surface and core layer. To obtain high quality bonding between those two layers in such a way that monolithic composite condition is fullfilled, connectors will be required to joint the surface and core layer forming the sandwiched concrete

structure. A study of the relationship between the flexural deformation and the strength of the sandwiched concrete structure is required.

II. LITERATURE REVIEWS

A. Sandwich Structure

Sandwich structure is a structure that is composed of two strong and stiff thin layers made of solid material that are separated by a thick layer of low density material with lower strength and stiffness than the two other layers (Callister, 1997). The two thin layers are called skins and the mid layer is known as core (Gambar 2.1). In most cases (Corden, 1990), An efficient sandwich structure can be obtained if the weight of its core is equal to the total weight of its skins.

According to Jones, R.M. (1975), sandwich structures combine the superiority of the materials used as its layer, namely, the high strength and stiffness of the skin layers and the low density of the concrete core layer. The result is a structure that is strong and stiff yet lightweight.




Fig. 1 Concrete sandwich structure

According to Van Straalen (1998), attentions must be paid on several issues related to the core layer, i.e.,

- The core layer must be strong enough in perpendicular direction to the skin layers, such that the distances between layers are constant.
- The core layer must be stiff enough under shear loading, such that when the sandwich structure bends the skin layers do not slide against each other. If the layers slide, the composite effect is lost. As a result each layer acting independently.
- The core layer must be stiff enough such that the skin layers stay level under bending load. If the core layer is not stiff enough delamination will happen.

For the skin layers the following need to be considered:

- The skin layer must be able to withstand tension, compression and shear loads on the x-y plane of the sandwich structure.
- The skin layers must also be able to support bending load, that is tension load on one side and compression load on the other.

The material of the skin layers can be isotropic or anisotropic. Each skin layer in general is made of same material. The main material properties of the skin layers is elasticity modulus, tensile and compressive strength, and Poisson's ratio.

B. Mechanical Behavior of Sandwiched Beams

The mechanical behavior of the sandwich beams under external and other types of loading is very complex. When a

composite beam structure is loaded under a flexural loading at the service load level, the possible composite condition that occurs in the beams can be classified into: Fully composite, when all layers of the composite are jointed in a way such that the composite structure can act as a monolithic structure. The Connectors must be able to transform all longitudinal shear forces such that the resulted bending stresses distribution is continuous over the cross section of the beam (Fig. 2.a).

Partial composite, i.e., the connectors that connect different composite layers transfer part of the longitudinal shear force in the beam (Fig. 2.b).

Non-composite, if there is no bonding between each composite layer that is where the core layer and the skin layers of the beam acting independently under flexural loading. (Fig. 2.c)

C. Ductility

Ductility is the ability of a structure or elements of structure to resist dominant inelastic responses while maintaining most of their initial strength in carrying the load. Ductility of a beam is defined as the ratio of ultimate deformation and yield deformation. Deformation considered can be kelengkungan, displacement, or rotation, according to SK SNI 1991, beam structure is considered to be ductile if the ductility factor of the cross section or structure is greater than 4.0 ($p > 4$).

III. METHODOLOGY

This study is based on bending test of the sandwich in a laboratory condition. Three specimens are used with the following specifications: the skin layers are precast concrete (NWC) with depth of 6 cm and the core layer (LWC) with depth 8 cm cast between the two concrete precast layers age 4 days.

A. Specimen Preparation

Basically the sandwich beam is a laminated beam in which the number of laminates or layers is three. The top and bottom layer in this study are called surface layers. In this study the surface layer is a precast concrete with dimensions 2100 mm lengthwise, breadth 100 mm and depth 60 mm. at the center of the skin layers we put a reinforcement grid 70 mm x 150 mm. The number of longitudinal reinforcement bar for each beam is 3 with diameter of 6 mm. Out of 4 beam specimens, two of them had a single row connectors attached to the middle part of the longitudinal reinforcement bar, as can be seen on Fig. 4. The surface of the precast concrete that going to touch the core layer were not roughened as the roughness effect is negligible.

The middle part of this sandwich, known as core, is 2100 mm in length, 100 mm in width and depth of 80 mm. The core is a cast in-situ placed between the two surface layers.

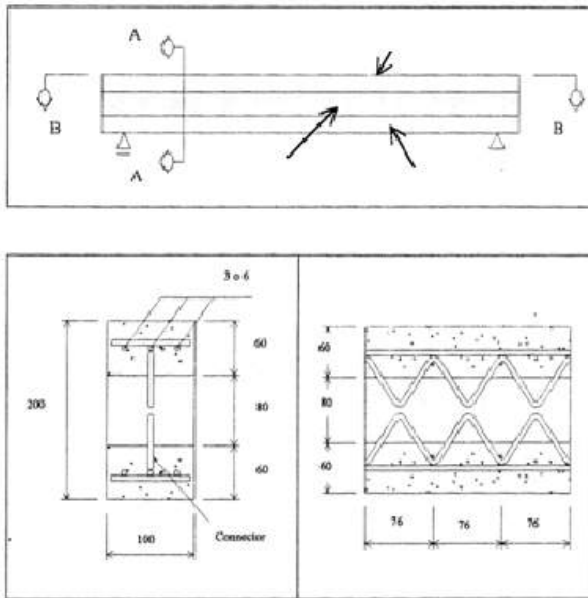


Fig. 2 Sandwiche concrete beam structure

B. Instrumentation

Instruments used in sandwiched beam testing in this study are:

- Reinforcement bar and concrete strain measurement apparatus
- Deflection measurement apparatus
- Slipage measurement apparatus
- Rotation measurement apparatus
- Load cell

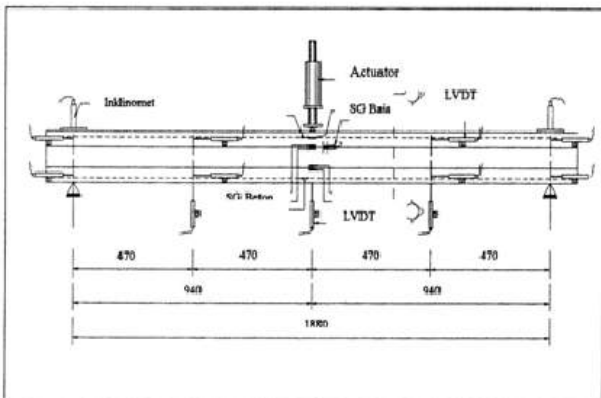


Fig.3 Position of the measurement apparatus in sandwiched concrete beam testing

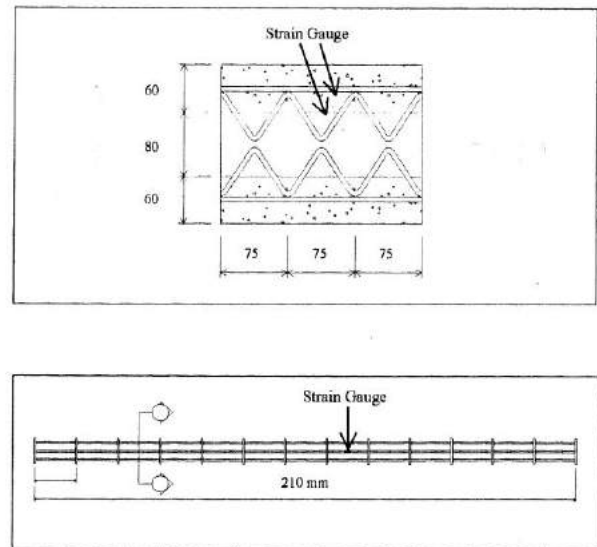


Fig. 4 Positions of the strain gauges on connector dan longitudinal reinforcement bars

C. Beam Loading

The testing was conducted on 28 days old beams. Monotonic and cyclic loading were performed. Beam specimens were laid horizontally in a loading frame. Both ends of the beam were simply supported using pin and roll supports. For cyclic testing, additional supports were employed so that the beam can handle cyclic load.

For monotonic testing, beams were loaded in downward direction at the mid span until they were failed. For the case of cyclic loading, the loading system employed isquasi-static reversed cyclic loading, i.e., the specimen is incrementally loaded in certain direction, for example, downward for compressive load and followed by reverse loading.

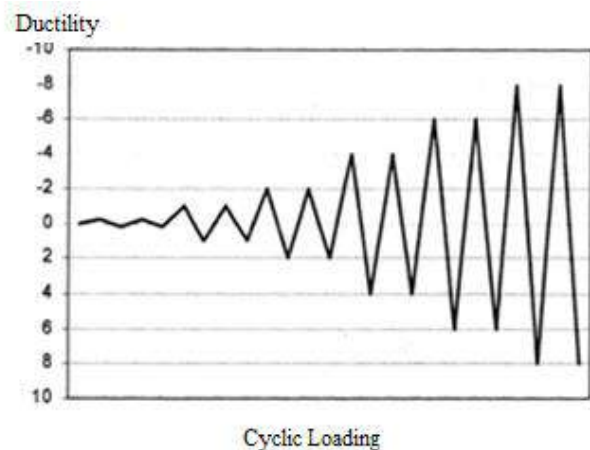


Fig.5 Loading Cycle


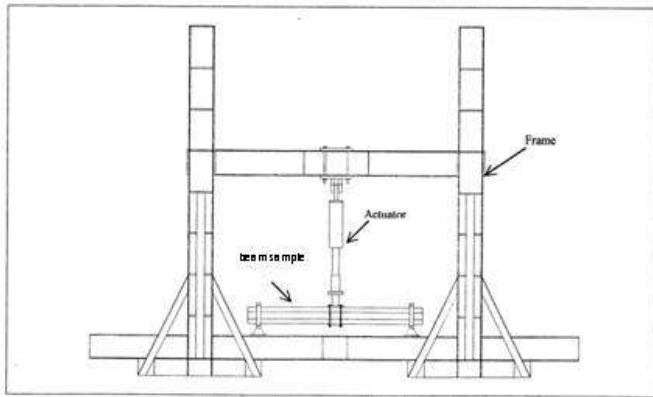



Fig.6 The setting of sandwiched concrete beam testing

IV. EXPERIMENTAL RESULT AND DISCUSSIONS

Based on data obtained during testing, the flexural strength of the beam for a particular loading stage can be computed. The loading for dynamic testing of N-L-N non-connector beams, N-L-N connector, and N-N-N connector were conducted based on the monotonic loading on N-L-N non-connector beams. The beams were design to possess similar bending moment in tension and compression directions. Therefore, the dimensions of tension and compression bars were the same.

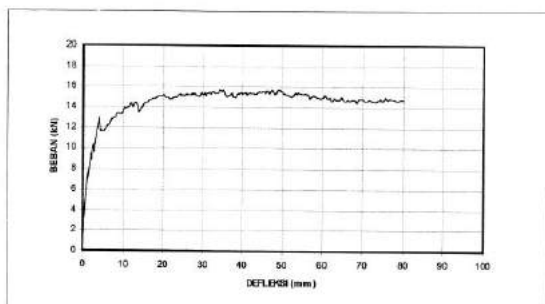


(a)

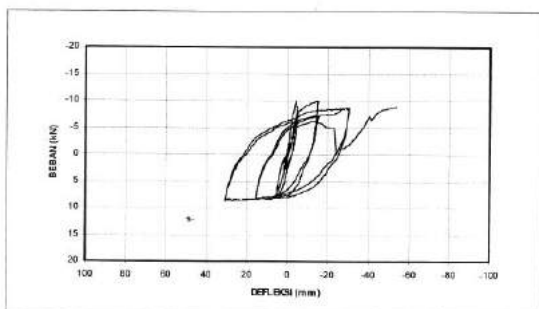


(b)

Fig. 7 Load-deflection hysteric curves for beam
 (a) N-L-N non connector (monotonic),
 (b) N-L-N non connector (daktilitas 6)

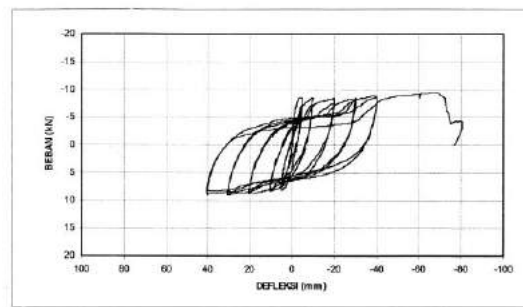

(a)

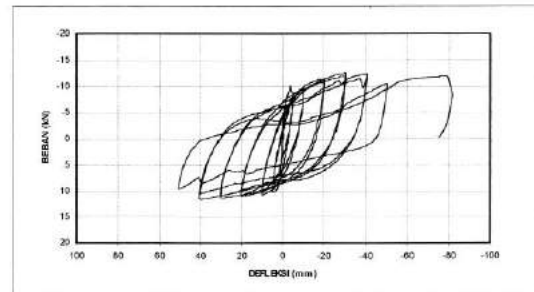

(b)

Fig. 8 Load-deflection hysteric curves for beam
 (a) N-L-N connector (ductility 8),
 (b) N-N-N connector (ductility 10).

a. N-L-N Non connector Beam

These beams were tested under monotonic loading. The bending moment that causes the initial crack on the beams is 3.299 kNm. The bending moment that causes the reinforcement bar start to yield is 6.119 KNm. The maximum bending moment that can be with stand by the beam is 7.388 kNm.

b. N-L-N Nonconnector Beam

These beams were tested under cyclic loading. The bending moment that causes the initial cracks on the beams is 1.993 kNm in compressive direction dan 1.335 KNm in tension direction. The bending moment that causes the longitudinal reinforcement to yield is 4.056 kNm in compressive directionand 3.784 kNm intension direction. Maximum bending moment that can be supported by the beams is 4.094 kNm in compressive directionand 4.056 kNm in tension direction.

c. N-L-N Connector Beam

These beams were tested under cyclic loading. The bending moment that causes the initial cracks on the beams is 2.496 kNm in compressive direction and 1.922 KNm in tension direction. The bending moment that causes the longitudinal reinforcement to yield is 4.023 kNm in compressive direction and 3.854 kNm in tension direction. The maximum bending moment that can be carried by the beams is 4.315 kNm

d. N-N-N Connector Beam

These beams were tested under cyclic loading. The bending moment that causes the initial cracks on the beams is 3.346 kNm in compressive direction and 3.346 kNm in tension direction. The bending moment that causes the longitudinal reinforcement to yield is 4.225 kNm in the compressive direction and 4.803 kNm in the tension direction. The maximum bending moment that can be carried by the beams is 5.635 kNm.

TABLE I
FLEXURAL STRENGTH FROM THE TEST RESULTS

Remarks	N-L-N Nonconnector	N-L-N Nonconnector	N-L-N Connector	N-N-N Connector
M_{cr}^+ (kNm)	-	1.335	1.922	3.346
M_{cr}^- (kNm)	3.299	1.993	2.496	3.346
P_{cr}^+ (kN)	-	2.840	4.090	7.12
P_{cr}^- (kN)	7.020	4.240	5.370	7.12
P_{cr} theoretical	7.994	7.178	7.830	7.639
M_y^+ (kNm)	-	3.784	3.854	4.803
M_y^- (kNm)	6.119	4.056	4.023	4.225
P_y^+ (kN)	-	8.050	8.200	10.220
P_y^- (kN)	13.020	8.630	8.560	8.990
P_y teoritis	9.294	9.243	9.285	9.015
M_u^+ (kNm)	-	4.056	-	-
M_u^- (kNm)	7.388	4.094	4.315	5.635
P_u^+ (kN)	-	8.630	-	-
P_u^- (kN)	15.720	8.710	9.180	11.990
P_u theoretical	11.798	11.751	11.791	11.806

If the strength coefficient (θ) for every loading condition in monotonic testing is 1, then the value of the ratio of the strength between monotonic and cyclic testing can be seen in Table II.

TABLE III
COMPARISONS OF STRENGTH RESULTED FROM MONOTONIC AND CYCLIC TESTING AT EACH LOADING CYCLE

Remark	N-L-N Nonconnector	N-L-N Connector	N-N-N Connector
Fracture Strength (θ^+)	0.4	0.581	1.424
Fracture Strength (θ^-)	0.6	0.756	1.424
Yield Strength (θ^+)	0.62	0.630	0.785
Yield Strength (θ^-)	0.66	0.657	0.690
Ultimate Strength (θ^+)	0.549	0.584	0.763
Ultimate Strength (θ^-)	0.550	0.584	0.763

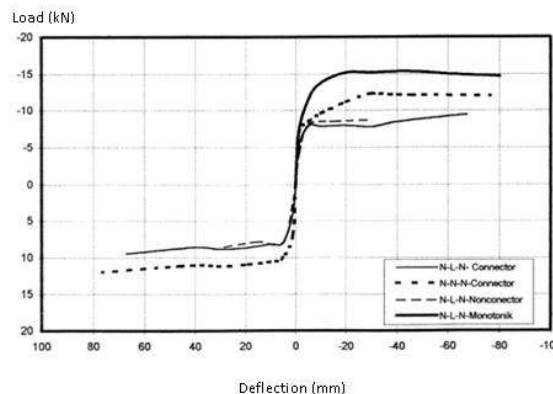


Fig. 9 Load-deflection curve for idealized loading

V. CONCLUSIONS

- Load-deflection hysteretic curve obtained from cyclic testing shows that the shapes of the curve in tension and compression directions is more or less similar.
- Ductility that can be responded by the beams depend on the type of loading, the use of connectors, and the quality of the core concrete. For N-L-N nonconnector beam the ductility of the monotonic testing can reach 16, while N-L-N connector beam ductility only reach 8, and NNN beam ductility can reach 10. There was a degradation of strength and stiffness at the even cycle ductility caused by slippage at small load (*pinching effect*).
- Bonding between the two different concrete layers heavily influenced the composite behavior of the beams.
- The flexural strength of the sandwiched concrete beams is dictated by the types of loading, the use of connector, and the quality of the core concrete.

REFERENCES

- [1] ACI(1991), Standard Practice for Selecting Proportions for Structural Lightweight Concrete – ACI 211.2.91, ACI Manual of Concrete Practise Part 1, American Concrete Institute, Detroit.
- [2] ACI(1993), Guide for Selecting Proportions for High Strength Concrete with Portland cement and Fly Ash – ACI 211.4R-93, ACI Manual of Concrete Practise Part 1, American Concrete Institute, Detroit.
- [3] CEB-FIP(1998), FIP Guide to Good Practice: Composite Floor Structures, FIB CEB-FIP, May'98
- [4] FIP(1983), FIP Manual of Lightweight Agregate Concrete, Second Ed., John Wiley and Sons.
- [5] Howard G. Allen, Analysis and Design of Structural Sandwich Panels, Pergamon Press
- [6] Park, R., Paulay, T. (1975), Reinforced Concrete Structures, Jhon Wiley & Sons.
- [7] SK SNI T-15-1991, Tatacara Penghitungan Struktur Beton Untuk Bangunan Gedung, Departemen Pekerjaan Umum, Yayasan LPMB, Bandung.

Hosted By :
Faculty of Engineering and Faculty of Computer Science
Universitas Bandar Lampung (UBL)

