

# INTERNATIONAL CONFERENCE



The Second International Conference on  
Engineering and Technology Development

# 2<sup>nd</sup> ICETD 2013

27, 28, 29 August 2013, Bandar Lampung, Indonesia



**PROCEEDINGS**



In  
Cooperations  
With :



الجامعة الإسلامية العالمية  
INTERNATIONAL ISLAMIC UNIVERSITY MALAYSIA  
يؤيدوننا في العلم والابتكار والتميز



Hosted by :

Faculty of Engineering and Faculty of Computer Science,  
Bandar Lampung University (UBL), Indonesia

# 2<sup>nd</sup> ICETD 2013

THE SECOND INTERNATIONAL CONFERENCE  
ON ENGINEERING AND TECHNOLOGY DEVELOPMENT

28 -30 January 2013  
Bandar Lampung University (UBL)  
Lampung, Indonesia

## PROCEEDINGS

Organized by:



Faculty of Computer Science and Faculty of Engineering  
Bandar Lampung University (UBL)  
Jl. Zainal Abidin Pagar Alam No.89 Labuhan Ratu, Bandar Lampung, Indonesia  
Phone: +62 721 36 666 25, Fax: +62 721 701 467  
website : [www.ubl.ac.id](http://www.ubl.ac.id)

## PREFACE

The Activities of the International Conference is in line and very appropriate with the vision and mission of Bandar Lampung University (UBL) to promote training and education as well as research in these areas.

On behalf of the Second International Conference on Engineering and Technology Development ( 2<sup>nd</sup> ICETD 2013) organizing committee, we are very pleased with the very good response especially from the keynote speaker and from the participans. It is noteworthy to point out that about 80 technical papers were received for this conference.

The participants of the conference come from many well known universities, among others : University Kebangsaan Malaysia – Malaysia, APTIKOM – Indonesia, Institut Teknologi sepuluh November – Indonesia, Surya Institute – Indonesia, International Islamic University – Malaysia, STMIK Mitra Lampung – lampung, Bandung Institut of Technology – Bandung, Lecture of The Malahayati University, B2TP – BPPT Researcher – lampung, Starch Technology Center – Lampung, Universitas Islam Indonesia – Indonesia, Politeknik Negeri Malang – Malang, University of Kitakyushu – Japan, Gadjah Mada University – Indonesia, Universitas Malahayati – Lampung, Lampung University – lampung, Starch Technology Center – Lampung, Universitas Riau – Riau, Hasanuddin University – Indonesia, Diponegoro University – Indonesia, King Abdulaziz University – Saudi Arabia, Parahyangan Catholic University – Indonesia , National Taiwan University– Taiwan, Surakarta Christian University – Indonesia, Sugijapranata Catholic University – Indonesia, Semarang University – Indonesia, University of Brawijaya – Indonesia, PPKIA Tarakanita Rahmawati – Indonesia, Kyushu University, Fukuoka – Japan, Science and Technology Beijing – China, Institut Teknologi Sepuluh Nopember – Surabaya, Researcher of Starch Technology Center, Universitas Muhammadiyah Metro – Metro, National University of Malaysia – Malaysia.

I would like to express my deepest gratitude to the International Advisory Board members, sponsor and also to all keynote speakers and all participants. I am also gratefull to all organizing committee and all of the reviewers who contribute to the high standard of the conference. Also I would like to express my deepest gratitude to the Rector of Bandar Lampung University (UBL) who give us endless support to these activities, so that the conference can be administrated on time

Bandar Lampung, 29 August 2013-08-26

Mustofa Usman, Ph.D  
2<sup>nd</sup> ICETD Chairman

# **PROCEEDINGS**

## **2<sup>nd</sup> ICETD 2013**

The Second International Conference  
On Engineering And Technology Development

**28 -30 January 2013**

### **INTERNATIONAL ADVISORY BOARD**

Y. M Barusman, Indonesia  
Ahmad F. Ismail, Malaysia  
Mustofa Usman, Indonesia  
Moses L. Singgih, Indonesia  
Andreas Dress, Germany  
Faiz A.M Elfaki, Malaysia  
Warsono, Indonesia  
Raihan Othman, Malaysia  
Zeng Bing Zen, China  
Tjin Swee Chuan, Singapore  
Khomsahrial R, Indonesia  
Rony Purba, Indonesia  
Alex Tribuana S, Indonesia  
Hon Wei Leong, Singapore  
Imad Khamis, USA  
Rozlan Alias, Malaysia  
Rudi Irawan, Indonesia  
Gusri Ibrahim, Indonesia  
Jamal I Daoud, Malaysia  
Riza Muhida, Indonesia  
Heri Riyanto, Indonesia  
Agus Wahyudi, Indonesia  
Lilies Widojoko, Indonesia

# **PROCEEDINGS**

## **2<sup>nd</sup> ICETD 2013**

The Second International Conference  
On Engineering And Technology Development

**28 -30 January 2013**

### **STEERING COMMITTEE**

#### **Executive Advisors**

Dr. M. Yusuf S. Barusman  
Andala R. P. Barusman, MA.Ec

#### **Chairman**

Mustofa Usman, Ph.D

#### **Co-Chairman**

Dr. Ir. Hery Riyanto, MT  
Ahmad Cucus, S.Kom., M.Kom

#### **Secretary**

Marzuki, S.Kom., M.Kom  
Maria Shusanti Febrianti, S.Kom., M.Kom

#### **Technical Committee**

Indyah Kumoro, ST. IAI  
Ardiansyah, ST., MT  
Sofiah Islamiah, ST. MT  
Taqwan Thamrin, ST., MSc  
Dina Ika Wahyuningsih, S.Kom  
Agus Sukoco, M.Kom  
Hj. Susilowati, ST. MT  
Haris Murwadi, ST, MT  
Robby Yuli Endra, S.Kom., M.Kom  
Fenty Ariani, S.Kom., M.Kom

#### **Treasure**

Samsul Bahri, SE  
Dian Agustina, SE

# **PROCEEDINGS**

## **2<sup>nd</sup> ICETD 2013**

The Second International Conference  
On Engineering And Technology Development

**28 -30 January 2013**

### **ORGANIZING COMMITTEE**

#### **Chair Person**

Dr. Ir. Hery Riyanto, MT

#### **Vice Chair Person**

Yuthsi Aprilinda, S.Kom., M.Kom

#### **Treasure**

Dian Agustina, S.E

#### **Secretary**

Aprizal, ST. MT

Ir. Tjejeng Sofyan, MM

Ir. Muhammad Zein, MT

Ir. Bambang Pratowo, MT

#### **Special Events**

Ir. Juniardi, MT

Ir. Indra Surya, MT

Ir. Sugito, MT

DR. Baginda Simaibang, M.Ed

Berry Salatar, S.Pd

Yanuar Dwi Prasetyo, S.Pd.I., M.A

#### **Receptionist**

Ir. Najamudin, MT

Kunarto, ST. MT

IB. Ilham Malik, ST. MT

Ir.A Ikhsan Karim, MT

Ir. Asikin, MT

Usman Rizal, ST., M.MSi

#### **Transportation and Acomodation**

Irawati, SE

Desi Puspita Sari, S.E

Tanto Lailam, S.H

Ilyas Sadad, S.T., M.T

**Publication and Documentation**

Ir. Indriati Agustina Gultom, M.M

Noning Verawati, S.Sos

Hesti, S.H

Rifandi Ritonga, SH

Violita, S.I.Kom

**Cosumption**

Dra. Yulfriwini, M.T

Wiwin Susanty, S.Kom., M.Kom

Fenty Ariani, S.Kom., M.Kom

Reni Nursyanti, S.Kom., M.Kom

Erlangga, S.Kom

Arnes Yuli Vandika, S.Kom

**Facility and Decoration**

Siti Rahma Wati, SE

Dina Ika Wahyuningsih, S.Kom

Zainal Abidin, SE

Ahyar Saleh, SE

Eko Suhardiyanto

Wagino

Sugimin

## Table Of Content

Organizing Committee .....	i
Table Of Content.....	v
Keynote Speaker	
1. Recent Advances in Biofuel Cell and Emerging Hybrid System <b>Abdul Aziz Ahmad and Raihan Othman</b> .....	1
2. Waste Utilization Study Tailing Gold Mine in Way Linggo-Lampung, as Fine Aggregate Materials for Producing Mortar Materials based on concept of Green Technology <b>Lilies Widodojoko &amp; Susilawati</b> .....	8
3. Infrastructure Health Monitoring System (SHM) Development, a Necessity for Maintance and Investigation <b>Prof. Dr. Priyo Suprobo, Faimun, Arie Febry</b> .....	17
4. Four Phases Quality Function Deployment (Qfd) By Considering Kano Concept, Time And Manufacturing Cost <b>Prof. Dr. Moses L Singgih, Dyah L. Trenggonowati, Putu D. Karningsih</b> ....	22



Speaker

1. Comparative Analysis for The Multi Period Degree Minimum Spanning Tree Problem  
**Wamiliana, Amanto, and Mustofa Usman**..... 39
2. Choosing The Right Software In Supporting The Successful of Enterprise ERP Implementation  
**Yodhie Yuniarthe, Idris Asmuni**..... 44
3. Climate Adaptive Technology In Maintaining Vernacularism Of Urban Kampong Case study: Kampung Adat (Indiginous) Mahmud, Bandung District, West Java  
**Marcus Gartiwa**..... 50
4. The Prospect Of Diesohol In Facing Fossil Fuel Crissis  
**M.C. Tri Atmodjo**..... 63
5. The Potential Of Agriculture And Forestry Biomass Wastes As Source Of Bioenergy  
**Hardoyo**..... 66
6. The Importance of Education Facility as Sustainable Urban Generation Tool  
**Fritz Akhmad Nuzir, Haris Murwadi and Bart Julien Dewancker** ..... 71
7. The implementation of Secton Method for Solving Systems of Non Linear Equations  
**Nur Rokhman** ..... 80
8. Quality Control Analysis Into Decrease The Level Defects On Coffee Product  
**Heri Wibowo, Sulastri and Emy Khikmawati** ..... 85
9. Public Transpotion Crisis In Bandar Lampung  
**Ida Bagus Ilham Malik** ..... 89
10. Geospatial Analysis of Land Use Change in Way Kuripan Watershed, Bandar Lampung City  
**Candra Hakim Van Rafi'1., Dyah Indriana Kusumastuti2., Dwi Jokowinarno**..... 99
11. Material Utilization Technology Of Agriculture And Forestry Waste  
**Hardoyo**..... 105
12. The Supply Chain System Of Cassava On The Tapioca Industry  
**Hardoyo**..... 108
13. Glass Technology In Natural Light Glasses On Aperture Element In The Architecture World  
**Muhammad Rija & MT Pedia Aldy** ..... 113

14. An Eksperimental Permeable Asphalt Pavement Using Local Material Domato Stone On Quality Of Porous Asphalt  
**Firdaus Chairuddin, Wihardi Tjaronge, Muhammad Ramli, Johannes Patanduk** ..... 117
15. Coordination Of Architectural Concepts And Construction Systems  
**Eddy Hermanto.** ..... 129
16. Seismic Assessment of RC Building Using Pushover Analysis  
**Riza Ainul Hakim.**..... 136
17. Viscosity and Liquidity Index Relation for Elucidating Mudflow Behavior  
**Budijanto Widjaja and Shannon Hsien-Heng Lee.**..... 143
18. The Use of Pozzolanic Material for Improving Quality of Strontium Liquid Waste Cementation in Saline Environment during Nuclear Waste Immobilization Process  
**Muhammad Yusuf, HayuTyasUtami, Tri SulistiyoHariNugroho, SusetyoHarioPutero** ..... 148
19. Geospatial Analysis Of Land Use And Land Cover Changes For Discharge At Way Kualagaruntang Watershed In Bandar Lampung  
**Fieni Yuniarti, Dyah Indriana K, Dwi Joko Winarno.**..... 153
20. Wifi Network Design For High Performance  
**Heru Nurwarsito, KasyfulAmron,BektiWidyaningsih** ..... 161
21. Studi on The Efficiency Using Nature Materials in The Structural Elements of Reinforced Concrete Beam  
**Yasser, Herman Parung, M. Wihardi Tjaronge, Rudy Djamaluddin.**..... 167
22. The Research Of Slow Release Nitrogen Fertilizer Applied In Sugarcane (Saccharum Officinarum) For Green Energy Bioethanol  
**M.C. Tri Atmodjo, Agus Eko T. Nurul Rusdi, Sigit Setiadi, and Rina.**..... 179
23. Energy Utilization Technology Of Agriculture And Forestry Waste  
**Hardoyo.**..... 185
24. Implementation Of Fuzzy Inference System With Tsukamoto Method For Study Programme Selection  
**Fenty Ariani and Robby Yuli Endra.** ..... 189
25. The Analysis of Video Conference With ITU Standarization (International Telecommunication Union) That Joining in Inherent At Bandar Lampung University  
**Maria Shusanti F, Happy Reksa** ..... 201

26. The E-internal audit iso 9001:2008 based on accreditation form assessment matrix in study program for effectiveness of monitoring accreditation <b>Marzuki, Maria Shusanti F.</b> .....	207
27. The Developing Of e-Consultations For Effectiveness of Mentoring Academy <b>Ahmad Cucus, Endang K</b> .....	214
28. The Evaluation of information system performance in higher education case study with EUCS model at bandar lampung university <b>Reni Nursyanti, Erlangga.</b> .....	221
29. The Analysis Of History Collection System Based On AndroidSmartphone With Qr Code Using Qr CodeCase Study: Museum Lampung <b>Usman Rizal, Wiwin Susanty, Sutrisno.</b> .....	230
30. Application of Complaint Handling by Approach Model of ISO 10002 : 2004 to Increase Complaint Services <b>Agus Sukoco and Yuthsi Aprilinda.</b> .....	235
31. Towards Indonesian Cloud Campus <b>Taqwan Thamrin, Iing Lukman, Dina Ika Wahyuningsih</b> .....	252
32. Bridging Router to ADSL Modem for Stability Network Connection <b>Arnes Yuli Vandika and Ruri Koesliandana.</b> .....	257
33. The Effect of Use Styrofoam for Flexural Characteristics of Reinforced Concrete Beams <b>Yasser , Herman Parung, M. Wihardi Tjaronge, Rudy Djamaluddin</b> .....	261
34. The Estimation Of Bioethanol Yield From Some Cassava Variety <b>M.C. Tri Atmodjo</b> .....	273
35. Effect of Superficial Velocity of Pressure Difference on The Separation of Oil And Water by Using The T-Pipe Junctionl <b>Kms. Ridhuan and Indarto.</b> .....	277
36. The use of CRM for Customer Management at Cellular Telecommunications Industry <b>Ayu Kartika Puspa.</b> .....	293
37. Indonesian Puslit (Centre Of IT Solution) Website Analysis Using Webqual For Measuring Website Quality <b>Maria Shusanti Febrianti and Nurhayati.</b> .....	297
38. The E-internal audit iso 9001:2008 based on accreditation form assessment matrix in study program for effectiveness of monitoring accreditation <b>Marzuki, Maria Shusanti F.</b> .....	307

39. Enhancing Quality Software Through CMMI-ISO 9001:2008 and ISO 9126 <b>Agus Sukoco</b> .....	320
40. Value Analysis Of Passenger Car Equivalent Motorcycle (Case Study Kartini Road Bandar Lampung) <b>Juniardi, Aflah Efendi</b> .....	337
41. Alternative Analysis Of Flood Control Downstream Of Way Sekampung River <b>Sugito, Maulana Febramsyah.</b> .....	347
42. Analysis Of Fitness Facilities And Effective Use Of Crossing Road <b>Juniardi, Edi Haryanto.</b> .....	353
43. Study On Regional Development Work Environment Panjang Port Lands In Support Bandar Lampung City As A Service And Trade <b>Ir. A. Karim Iksan, MT, Yohn Ferry.</b> .....	359
44. Analytical And Experimental Study Bamboo Beam Concrete <b>Hery Riyanto, Sugito, Juli</b> .....	370
45. Comparative Analysis Of Load Factor Method Static And Dynamic Method (Case Study Akdp Bus Route Rajabasa - Bakauheni) <b>A. Ikhsan Karim, MT., Ahmad Zulkily.</b> .....	378
46. Optimization Utilization Of Water Resources dam Batutegei Using Method Of Linear Program <b>Aprizal, Hery Fitriyansyah</b> .....	386
47. Characteristics Generation Traffic Patterns And Movement In Residential Area (Case Study Way Kandis Residential Bandar Lampung) <b>Fery Hendi Jaya, Juniardi,</b> .....	392
48. Use Study On Slight Beam Reinforced Concrete Floor Plate in Lieu Of Secondary Beam <b>Hery Riyanto, Sugito, Lilies Widodjoko, Sjamsu Iskandar</b> .....	399
49. Observation Of The Effect Of Static Magnetic Field 0.1 Mt On A-Amylase Activity In Legume Germination <b>Rochmah Agustrina, Tundjung T. Handayani, and Sumardi.</b> .....	405
50. Effectiveness Analysis Of Applications Netsupport School 10 Based Iso / Iec 9126-4 Metrics Effectiveness <b>Ahmad Cucus, Nelcy Novelia</b> .....	413
51. Comparative Performance Analysis Of Banking For Implementing Internet Banking <b>Reza Kurniawan</b> .....	418

## COORDINATION of ARCHITECTURAL CONCEPTS and CONSTRUCTION SYSTEMS

### Case Study:

The basic principles of building applications on Garuda II and sustainable development at the Dr.Kariadi-hospital in Semarang.

Eddy Hermanto.

(S3 Engineering Student of Architecture and Urban)


**Abstract:** This paper reported the implementation of coordination between architectural concept and construction system in the area of dr.Kariadi hospital, in Semarang central Java. In principle, the coordination in the design-construction process can achieve the benefits of development by improving the quality of technical design. The use of Tartan Grid concept closely related to the coordination module that integrates seamlessly blend with the application of the concept of green architecture and design quality indicator (dqi) in architectural design can improve the quality of technical design. Furthermore, the construction phase was green construction methods will improve the performance of related construction projects of sustainable keyword: minimizing waste and pollutants, and achieved self sufficient. Matters are very useful for the future utilization of the building through post-occupancy evaluation.

**Keywords:** system, tartan-grid, technology, sustainable development.

### 1. INTRODUCTION

The study was conducted at area hospitals Dr.Kariadi, in Semarang, which is being carried out and the construction of several tall buildings on the other side there is a protected historic building (conservation) which functioned for the general administration of the hospital.

Construction industry, in principle, is a project development activities are constrained execution time, different characteristics of each project, taking place once completed, which consists of its phase process: planning (master plan, feasibility study), design / drafting (basic / concept, preliminary, detail engineering), procurement (procurement), construction / physical implementation, acceptance, operation and maintenance . Development of the construction industry has now reached from Conventional, Rational until industry especially in the scope of the use of technologies that are industrializing, then the goal as described above to be

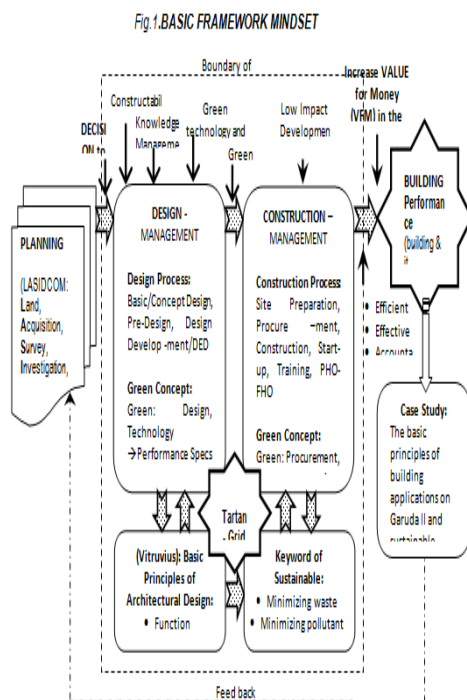

more of a challenge to be achieved so that the project which has one of the characteristics: large volume, high technology, high risk, using a multi-year contract sides need consideration: efficient, effective and accountable. In this context, one of the things that led to the success of construction projects is through the establishment of a construction project organization is partnering/alliance. Forms of partnering in principle follows the basic pattern and the shape of the relationship in Client-Designer-Contractor (CDC) (2,9).

The basic principle of the construction projects that have been put forward by: (1, 2), as the Iron Triangle consisting of the cost, time and quality, which is called the external triangle according to (9). The triangular relationship of the above to manage the three main components of project management: Time, Quality, Cost (TQC) as a success. Furthermore, the success of a construction project initially measured based TQC, but appropriate development is now an element of customer satisfaction including (6). The success of achieving quality of building construction projects are very closely related to the application of quality management worth and worth doing at all stages of the project (7). In a construction project there are stages where the design and construction phases of these two stages together have a major influence and contribute to determine the process to achieve the final product-quality especially on technical sides.

If the sequence is summarized in the development process, the things mentioned above will consist of: preparation includes green technology applications; site development and green or circumstances existing land / sites, green design and human-construction bionomic. All of these items starting from the use of The Tartan-grid closely related to the coordination-module.

Now the green concept, in line with the global warming issue and the Millennium Development Goals (MDGs, especially the seventh point: ensure environmental sustainability, and eighth point: develop a global partnership for development) where the target based on the achievement of certain time-existence strengthens the role of architecture as science and art.

The concept of Tartan-column grid which is a blend of the interface and the distance of each column are the size dimensions of the corner column (20x20 CM<sup>2</sup>) and middle columns (10x10 CM<sup>2</sup>) are Necessary to support the roof providing a full freedom in moving the infill components. The Tartan-grid applications generate a regularity in the construction of buildings related to the architectural, structural, mechanical and electrical, outdoor space design, preparation of working space for the physical development of contractor activities, coordinating all of the modules in a system.

In the design process of the building needed a tool to define and evaluate the substance of the design (Design Quality Indicator / DQI). Operational applications based on side-by-side: the impact, build quality, and functionality. These three elements each have overlapping areas (as added value) and the third focal point is the overlapping area of excellence (3). Vitruvius on architecture principles in his book 'ten books in architecture', asserted his opinion that the basic principle should show as utility structure (the purpose and use), Firmitas (materials and construction) and Venustas (proportion and scale). Matters of the building has undergone significant changes that building designers are faced with a variety of quality improvement requirements and constraints that must be met, for example: buildings are designed in harmony environment (green building) and innovative (7).

In principle, the system at this stage of the design process of a building characterized as buildings that are generated through: definition of scope, analyzed and formed into three-dimensional and has a specific nature. So in the process of construction of the building there is a design process that determines the success of the quality of the building. In the design process should be sufficient to control the performance of the main section. It continues to the end of the construction process so that the project goal is reached (5). Caused by the project team's performance does not meet the quality of the result in reworking (reworks) are many times that lead to exceeding the project schedule. This is a fundamental weakness of the building because the building the appearance aspect of the system was not achieved (10).

It is therefore very important and essential for any development of land in an area, especially in urban areas to prepare for the construction of the building and its environment in an efficient, effective and accountable as long as possible, by the use of environmentally friendly technologies.

## 2. METHODOLOGY

Identify the problem in this study: how the coordination of architectural concepts and construction system can run smoothly? Respondents consisted of project owners, project technical team, consultant designers, construction management consultant, Public Works Department of Human Settlements central Java, all of which carried an interview. The necessary data is primary data, taken directly from the sampling unit with equipment / tool with a list of questions / questionnaires.

The objectives of the study are to determine design of the developed area;

and to develop a model of system to achieve building performance.

## 3. RESULTS AND DISCUSSION

Number	Stage of the Design Process	Stage of the Construction Process	Human Economic (OPERATION)
1	<p><b>Basic/Concept Design:</b></p> <p>Grouping problem (Arditi and Gunaydin, 1997):</p> <ul style="list-style-type: none"> <li>• STAKEHOLDER</li> <li>• MANAGERIAL</li> <li>• TECHNICAL</li> <li>• EQUIPMENT/ENVIRONMENTAL</li> <li>• CULTURAL/POLITICAL</li> </ul> <p>Application/Implementation:</p> <p>Conducted more detailed elaboration of LASIDCOM: Land, Acquisition, Survey, Investigation, Design, Construction, Operation, Maintenance.</p> <p>MANAGEMENT (PARTNERING):</p> <ul style="list-style-type: none"> <li>&gt; DESIGN COLLABORATION</li> <li>&gt; TRUST</li> <li>&gt; OPEN COMMUNICATION</li> <li>&gt; RISK SHARING</li> </ul> <p>SUBSTANCES:</p> <ul style="list-style-type: none"> <li>+ KNOWLEDGE</li> <li>MANAGEMENT</li> <li>+ CONSTRUCTABILITY/BUILDABILITY</li> <li>+ QUALITY TECHNICAL DESIGN</li> <li>+ REGULATION</li> </ul>	<p><b>Site preparation:</b></p> <p>Site preparation:</p> <ul style="list-style-type: none"> <li>✓ Design Review</li> <li>✓ Create a timeline of project activities</li> <li>✓ Budget implementation plan</li> <li>✓ Project quality plan: materials, method of implementation, the technical requirements that must be met.</li> <li>✓ Exploration of materials available in the market</li> <li>✓ Project procurement plan: materials, equipments and tools, skilled labor and unskilled, working methods.</li> <li>✓ Regulation/ordinance or survey</li> <li>✓ Mobilization and demobilization of equipment</li> <li>✓ Preparation of skilled labor and unskilled</li> <li>✓ Site preparation</li> <li>✓ Construction method</li> </ul> <p>MANAGEMENT (PARTNERING):</p> <ul style="list-style-type: none"> <li>- Construction Partnering</li> <li>- Planning: Supply Chain Management (SCM)</li> <li>- Coordination, Monitoring, Evaluation, Controlling.</li> </ul>	<p>Construction: Industry in Indonesia requires:</p> <ul style="list-style-type: none"> <li>• Permission of the neighborhood population: project (Dutch language: Hereditaris &amp; Ordonantie)</li> <li>• Building permit (IMB)</li> <li>• Environmental Impact Assessment/EIA (in Indonesia: AMDAL)</li> </ul>

2	<p><u>Design Development:</u></p> <p>MANAGEMENT (PARTNERING):</p> <ul style="list-style-type: none"> <li>&gt; COORDINATION, MONITORING, EVALUATION, CONTROLLING</li> <li>&gt; DESIGN REVIEW</li> <li>&gt; APPLICATION of the PRINCIPLE of DESIGN OPTIMIZATION and GREEN DESIGN, COORDINATION of DESIGN DOCUMENTS</li> </ul> <p>SUBSTANCES:</p> <ul style="list-style-type: none"> <li>† KNOWLEDGE MANAGEMENT</li> <li>† CONSTRUCTABILITY</li> <li>† BUILDABILITY</li> <li>† QUALITY TECHNICAL DESIGN</li> <li>† GREEN DESIGN</li> <li>† REGULATION</li> </ul>	<p><u>Site development → construction:</u></p> <ul style="list-style-type: none"> <li>✓ Design Review</li> <li>✓ Total Quality Management (TQM-QC-QA)</li> <li>✓ Shop Drawing → Action plan → Erection to construction process</li> <li>✓ Site Meetings</li> <li>✓ Options: change jobs, change orders, technology substitution</li> <li>✓ Testing, building materials, work products, calibration equipments</li> <li>✓ Application: Supply Chain Management (SCM)</li> <li>✓ Application activities in fast track and considering the impact</li> <li>✓ Application of health and safety</li> <li>✓ Application of green construction</li> <li>✓ Comply with the contract and does not violate the applicable development regulations</li> <li>✓ Start up and training process</li> </ul>	<p><u>Construction:</u></p> <p>Industry in Indonesia requires:</p> <ul style="list-style-type: none"> <li>o Handover of construction on works from PWO to FWO</li> <li>o want of fitness function, manual book, how to use, maintain, cc and upkeep of buildings,</li> <li>o As Built Drawings.</li> </ul>
Nerap ve Impac t	Changes in design and engineering, Reveals.	Change order, Construction performance is not achieved, Construction failure.	Building performance is not achieved. Building failure by:

Scope of work	Apply to the construction of buildings with traditional methods / Design Bid Build (DBB) or the method of Design and Build (DB)
---------------	---

Table 1. Process of Design, Construction and Human Economic.



The Tartan Grid	8-10 floor high building design.		Construction Activities		Open Space Design	
	Tartan	Grid	Tartan	Grid	Tartan	Grid
<p>from the initial concept Tartan Grid: Size: column corner 30/20 CM2, the columns between column corner 10/10 CM2 and spacing between columns 100 CM.</p> <p><b>SWING DEVELOPED: For MULTI-ROLE and FUNCTION</b></p>	<p>concept: Size: corner columns and the columns between column corner 30/30CM2 and spacing between columns 800 cm.</p> <p>So the coordination module is 800 cm.</p> <p>Distance between buildings is 800cm. It is sufficient for the functioning of natural air movement, lighting the sky for the side and rear of the two buildings that face each other, infiltration wells (biopori, bioventilation), sewer and landscaping.</p> <p>Parking at the building with the pattern of double loaded corridor where width of the road for two-way car traffic is sized 800cm, the size of a parking space is 400cm long and there are three cars for every distance between columns.</p> <p>Wide ramp connecting the floor is 400cm. The width of the ramp connecting the floor is 400Cm where the distance from the ground floor to the basement floor is 320cm.</p> <p>Distance of floor to</p>	<p>Size: corner columns and the columns between column corner 30/30CM2 and spacing between columns 800 cm.</p> <p>Short slope and long slope from the tower crane that has applied each size 800cm and 2400cm.</p> <p>Field office building and office building contractors is a two-story temporary; 800x2400M2 size; second floor for contractor activities, first floor to perform activities of meetings, activities for construction management consultants and technical team owner, lavatory.</p> <p>Construction road width is 800cm. Size of a warehouse without roof is 2x300x3200M2, and space for vehicle operating heavy equipment is 3200x3200M2.</p> <p>Road construction apart from the consumer (health care services) where there is only one point of</p>	<p>So the coordination module is 800 cm.</p> <p>The distance between the edge of the column structure with tower crane column is 800cm.</p> <p>Distance effective width of the road (right of way) is 800cm.</p> <p>In the event of force majeure, the outdoor space is used as an emergency; hospital implemented a basic module building tent with 4x300x300M2 size. Distance between them 0.5 x 300cm.</p> <p>Distance between trees is 800M.</p> <p>Street lighting; columns is 800cm tall.</p> <p>Design outdoor space can be used as a multi-function activity, for example: break walking activities, cycling, had a mean size of 1600x3200M2.</p> <p>Each parking space has three in 300x400CM2 size where the width of the road for traffic flow is 800M.</p> <p>Ramp width of outer space to:</p>			

<ul style="list-style-type: none"> <li>floor is 400cm. the average distance from floor to ceiling is 270cm.</li> <li>&gt; Medium voltage electrical panel building of PLN is 300x300M.</li> <li>&gt; Power house in the basement has a size of (300 +400) x2400M</li> <li>&gt; Ground water tank in open space has a size of 300x400x400CM</li> <li>&gt; Chiller plant on the top of Ground water tank and WWTP</li> <li>&gt; The sewage treatment plant (WWTP) has size tub with four units, each collector has 300x400x200M size.</li> <li>&gt; Medical gas control building has a size of 300x2400x320M.</li> <li>&gt; Location of the hydrant box / pillar hydrant application designed jointly position at any distance 2400cm or 3200cm.</li> <li>&gt; If the application needs to be done post-tension concrete is effectively applied starting on the distance between the columns is 300cm.</li> </ul>	<ul style="list-style-type: none"> <li>intersection traffic flow and traffic arrangements are made with management traffic.</li> <li>↕ The width of the entrance / exit of construction land is 300cm.</li> <li>↕ At each distance of 300cm for strengthening the framework of scaffolding are diagonally brace the frame in three dimensions.</li> <li>↕ At each distance of 300cm to the utility grid horizontal (plumbing, ducting) applied to the main hanger. Similarly, for vertical use network utility main clamp.</li> <li>↕ Cable networks such as horizontal cable tray has a width to the size of 40, 80, 160cm</li> <li>↕ At the time of termination of the project, the rest of the land for the collection of unused work has multiples 300x300M size.</li> </ul>	<ul style="list-style-type: none"> <li>the basement floor is 400cm.</li> <li>• Rainwater catchment design patterned fish spines based on the size of the space module 300x300M.</li> <li>• In the design of rainwater network control basin at any distance 2400cm or 3200cm and small catchment wells on each spacing 300cm.</li> <li>• Design of outdoor space for parking, twelve ambulances are 2x6x400CM shaped double loaded corridor.</li> <li>• Small river as flood control has an effective size of the riverbed as the water flow 400cm, 400-300cm depth of the river, and the banks on either side of the river each horizontal width of 400cm. Landscape design done on the banks of the river serves as a river view.</li> </ul>
---	--	--

Table.1. Developing of The Tarian Grid in 8-10 floor high Building Design, Construction Activities and Open Space Design.

The main characteristics of the coordination of architectural concepts in building design with construction system is a key to reduce the uncertainty of the final result as the performance of a building construction project. In this case the most important is the application of the system must be able to ensure coordination in the design and construction process so there is no conflict or disputes, rework, and even the failure of the construction. To achieve success, the coordination must be optimized in terms of the substance of design in sustainable construction management.

Based on the planning stage, Based on the planning stage, then it should be considered important aspects, such as the scope of work, the proper equipment, competent personnel, working methods and organizational culture to support the success of the design and construction process as a whole project. Similarly, post-construction phase depends on strategic decisions that have been made in the planning stage. Finally, at the time held the post occupation evaluation will achieve optimal building performance.

Figure.1.shows the basic framework mindset. Framework shows the process and substance of the most influential and interact within the system boundary. If in it there is a small effect due to the impact of design quality is achieved, then there is sustainable development.

Table.1.shows that Stage of the Design Process in which there are elements within each classification grouping interact internally activities affect the next stage of construction process in which an interaction of internal activity, finally there is the human bionomic stage of the process.

Table.2. shows that The Tartan Grid concept developed multi role function has a significant influence on the following aspects: 8-10 floor high building design, construction activity, and open space design. Occurred relative

similarity in coordination modules: 80-800-80cm. In this case, the various substances design object has a correlation with the size of the basis in coordination module.

#### 4. CONCLUSION


This study, however, indicate that the importance of the role that design should be able to achieve an increase in the optimal design of technical quality in the process of building projects. Design coordination will reduce the impact of construction failures, reworks and change order of items in the contract work. Contrary to the above, the technical quality of design coordination produces a better design from different point of view. The Author will continue study in monitoring the performance of post-occupancy evaluation related to the health care activities in this building and development of other buildings.

#### 5. ACKNOWLEDGEMENTS

The Author would like to thank to the Department of Architecture, Engineering Faculty, Diponegoro University; and the General Hospital Dr.Kariadi, Semarang.

#### 6. REFERENCES

1. Akintola Akintoye, Eamon Fitzgerald, 1995, **Design and build: a survey of architects' views**, *Engineering, Construction and Architectural Management J*, Vol. 2 Iss: 1, pp.27 - 44
2. Atkinson, 1999, **Project Management: Cost, Time and Quality, Two Best Guesses and A Phenomenon, It's Time to Accept Other Success Criteria**, *Int'l Journal Project Management*, 17(6), 337-342.
3. Anonym, **"Getting Value for Money from Construction Projects through Design"**, NATIONAL AUDIT OFFICE/NAO (Commission of Architecture Building Environment/CABE, Organization of Government Commerce/OGC).
4. Habraken, N.J., 1972, *An Alternative to Mass Housing*, Praeger Publisher.
5. Haponava Tatsiana and Saad Al-Jibouri, 2010, **"Establishing influence of design process performance on end-project goals in construction using process-based model"**, *Benchmarking: an International Journal*, Vol. 17 Iss: 5, pp.657 – 676.
6. Liu and Walker, 1998, Evaluation of Project Outcomes, *J Constr Mngt Econm*, 16(2), 209-219.
7. Morris Hicky Morgan, 1960 (Memon, 2007), **The Ten Books On Architecture**. Dover Publication
8. Neale RH and Neale DE, 1989, *Project Management: Construction Planning*, Thomas Telford HQ London
9. Newcombe, 2000, The Anatomy of Two Projects: A Comparative Analysis Approach, *Int'l Journal of Project Management*, 18(3), 189-199.
10. Xiao.H and Proverbs, 2001, . Xiao and D. Proverbs, "The performance of contractors in Japan, the UK and the USA," *International Journal of Quality & Reliability Management*, vol. 19, pp. 672-687, 2002.

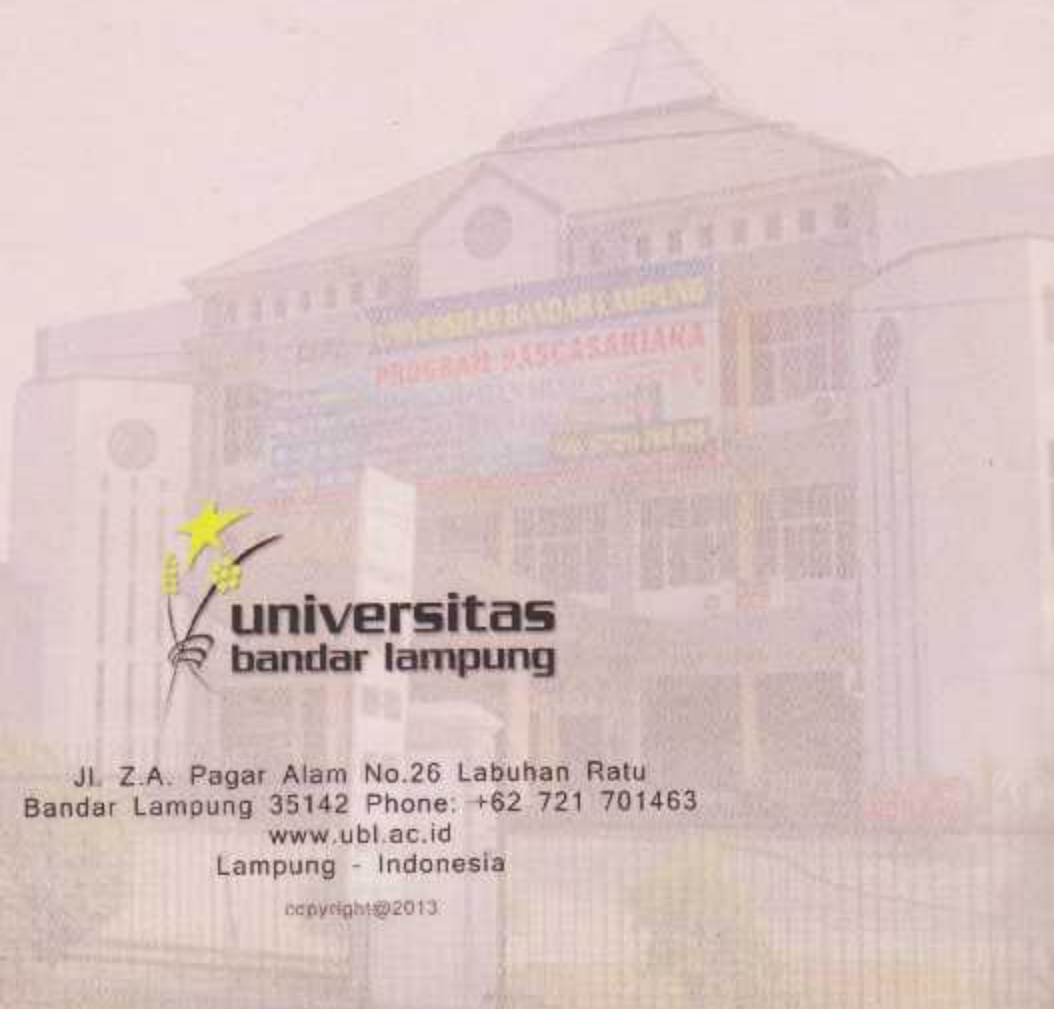

**universitas  
bandar lampung**

Jl. Z.A. Pagar Alam No.26 Labuhan Ratu  
Bandar Lampung 35142 Phone: +62 721 701463  
[www.ubl.ac.id](http://www.ubl.ac.id)  
Lampung - Indonesia

copyright © 2013