ISSN : 2301-5690

INTERNATIONAL CONFERENCE

ENGINEERING & TECHNOLOGY DEVELOPMENT
UBL ICETD
2013

The Second International Conference on Engineering and Technology Development

2nd ICETD 2013

27, 28, 29 August 2013, Bandar Lampung, Indonesia

PROCEEDINGS

In Cooperations With :

APTIKOM

INTERNATIONAL ISLAMIC UNIVERSITY MALAYSIA

SURYA INSTITUTE

Hosted by :
Faculty of Engineering and Faculty of Computer Science,
Bandar Lampung University (UBL), Indonesia

2nd ICETD 2013

The Second International Conference On Engineering And Technology Development

28 -30 January 2013
Bandar Lampung University (UBL)
Lampung, Indonesia

PROCEEDINGS

Organized by:

Faculty of Computer Science and Faculty of Engineering
Bandar Lampung University (UBL)
Jl. Zainal Abidin Pagar Alam No.89 Labuhan Ratu, Bandar Lampung, Indonesia
Phone: +62 721 36 666 25, Fax: +62 721 701 467
website :www.ubl.ac.id

ISSN 2301-6590

PREFACE

The Activities of the International Conference is in line and very appropriate with the vision and mission of Bandar Lampung University (UBL) to promote training and education as well as research in these areas.

On behalf of the Second International Conference on Engineering and Technology Development (2nd ICETD 2013) organizing committee, we are very pleased with the very good response especially from the keynote speaker and from the participans. It is noteworthy to point out that about 80 technical papers were received for this conference.

The participants of the conference come from many well known universities, among others : University Kebangsaan Malaysia – Malaysia, APTIKOM – Indonesia, Institut Teknologi sepuluh November – Indonesia, Surya Institute – Indonesia, International Islamic University – Malaysia, STMIK Mitra Lampung – lampung, Bandung Institut of Technology – Bandung, Lecture of The Malahayati University, B2TP – BPPT Researcher – lampung, Starch Technology Center – Lampung, Universitas Islam Indonesia – Indonesia, Politeknik Negeri Malang – Malang,University of Kitakyushu – Japan, Gadjah Mada University – Indonesia, Universitas Malahayati – Lampung, Lampung University – lampung, Starch Technology Center – Lampung, Universitas Riau – Riau, Hasanuddin University – Indonesia, Diponegoro University – Indonesia, King Abdulaziz University – Saudi Arabia, Parahyangan Catholic University – Indonesia , National Taiwan University– Taiwan, Surakarta Christian University – Indonesia, Sugijapranata Catholic University – Indonesia, Semarang University – Indonesia, University of Brawijaya – Indonesia, PPKIA Tarakanita Rahmawati – Indonesia, Kyushu University, Fukuoka – Japan, Science and Technology Beijing – China, Institut Teknologi Sepuluh Nopember – Surabaya, Researcher of Starch Technology Center, Universitas Muhammadiyah Metro – Metro, National University of Malaysia – Malaysia.

I would like to express my deepest gratitude to the International Advisory Board members, sponsor and also to all keynote speakers and all participants. I am also gratefull to all organizing committee and all of the reviewers who contribute to the high standard of the conference. Also I would like to express my deepest gratitude to the Rector of Bandar Lampung University (UBL) who give us endless support to these activities, so that the conference can be administrated on time

Bandar Lampung, 29 August 2013-08-26

Mustofa Usman, Ph.D
2nd ICETD Chairman

ISSN 2301-6590

PROCEEDINGS

2nd ICETD 2013

The Second International Conference
On Engineering And Technology Development

28 -30 January 2013

INTERNATIONAL ADVISORY BOARD

ISSN 2301-6590

PROCEEDINGS

2nd ICETD 2013

The Second International Conference
On Engineering And Technology Development

28 -30 January 2013

STEERING COMMITTEE

Executive Advisors
Dr. M. Yusuf S. Barusman
Andala R. P. Barusman, MA.Ec

Chairman
Mustofa Usman, Ph.D

Co-Chairman
Dr. Ir. Hery Riyanto, MT
Ahmad Cucus, S.Kom., M.Kom

Secretary
Marzuki, S.Kom., M.Kom
Maria Shusanti Febrianti, S.Kom., M.Kom

Technical Committee
Indyah Kumoro, ST. IAI
Ardiansyah, ST., MT
Sofiah Islamiah, ST. MT
Taqwan Thamrin, ST., MSc
Dina Ika Wahyuningsih, S.Kom
Agus Sukoco, M.Kom
Hj. Susilowati, ST. MT
Haris Murwadi, ST, MT
Robby Yuli Endra, S.Kom., M.Kom
Fenty Ariani, S.Kom., M.Kom

Treasure
Samsul Bahri, SE
Dian Agustina, SE

ISSN 2301-6590

PROCEEDINGS

2nd ICETD 2013

The Second International Conference
On Engineering And Technology Development

28 -30 January 2013

ORGANIZING COMMITTEE

Chair Person
Dr. Ir. Hery Riyanto, MT

Vice Chair Person
Yuthsi Aprilinda, S.Kom., M.Kom

Treasure
Dian Agustina, S.E

Secretary
Aprizal, ST. MT
Ir. Tjejeng Sofyan, MM
Ir. Muhammad Zein, MT
Ir. Bambang Pratowo, MT

Special Events
Ir. Juniardi, MT
Ir. Indra Surya, MT
Ir. Sugito, MT
DR. Baginda Simaibang, M.Ed
Berry Salatar, S.Pd
Yanuar Dwi Prasetyo, S.Pd.I., M.A

Receiptionist
Ir. Najamudin, MT
Kunarto, ST. MT
IB. Ilham Malik, ST. MT
Ir.A Ikhsan Karim, MT
Ir. Asikin, MT
Usman Rizal, ST., M.MSi

Transportation and Acomodation
Irawati, SE
Desi Puspita Sari, S.E
Tanto Lailam, S.H

ISSN 2301-6590

Ilyas Sadad, S.T., M.T

Publication and Documentation
Ir. Indriati Agustina Gultom, M.M
Noning Verawati, S.Sos
Hesti, S.H
Rifandi Ritonga, SH
Violita, S.I.Kom

Cosumption
Dra. Yulfriwini, M.T
Wiwin Susanty, S.Kom., M.Kom
Fenty Ariani, S.Kom., M.Kom
Reni Nursyanti, S.Kom., M.Kom
Erlangga, S.Kom
Arnes Yuli Vandika, S.Kom

Facility and Decoration
Siti Rahma Wati,SE
Dina Ika Wahyuningsih, S.Kom
Zainal Abidin, SE
Ahyar Saleh, SE
Eko Suhardiyanto
Wagino
Sugimin

ISSN 2301-6590

Table Of Content

Speaker

ISSN 2301-6590

Geospatial Analysis of Land Use Change in Way Kuripan Watershed, Bandar Lampung City

Candra Hakim Van Rafi'i[1]., Dyah Indriana Kusumastuti[2]., Dwi Jokowinarno[3].
1,2,3Civil Engineering Department, The University of Lampung
Soemantri Brojonegoro Street No.1 Gedong Meneng, Bandar Lampung, Indonesia
[1]candrahakim_st@yahoo.com
[2]kusumast@gmail.com
[3]djokwin1969@hotmail.com

Abstract— *The purpose of the study is to analyze land use and land cover change impact on Way Kuripan discharge. Six scenarios of land use and land cover changes at Way Kuripan watershed area of 53.54 km² was developed based on geospatial analysis with Geographic Information System. Peak discharge is calculated by using rational method. From the six scenarios simulation, scenarios 1, 2, 3, and 4 maintained the protected areas of 80.15%. Land use and land cover changes done by changing areas from vacant land and agricultural areas to be residential, industrial and government office areas. From the analysis, peak discharge of scenarios 1, 2, 3, and 4 change slightly which are between 11.19% and 23.46%. These results are in contrast to scenarios 5 and 6, in which scenario 5 keep the protected areas about 53.35% while in scenario 6 left the protected areas around 30%. Those protected areas changed into residential areas. The result showed that in scenario 5, the peak discharge changed about 66.29%. While in scenario 6, it changed about 107.19%. It can be concluded that the existence of protected areas in Way Kuripan Watershed was very important role to reduce the peak discharge values*.

Keywords— land use and land cover change, peak discharge, GIS, Way Kuripan watershed.

1. INTRODUCTION

Development in andar Lampung City now requires spatial planning management that provides optimal benefits, harmonious and friendly to the environment. Unfortunately changes in watershed land use dominantly influence on the flood discharge. This phenomenon also occurs in Way Kuripan Watershed. The watershed has an area of 53.54 km². Its upstream is at Mount Betung. Way Kuripan river is one of the rivers that pass in Bandar Lampung City which flow into Lampung Bay. Its watershed has an important role to catch the water.

Unfortunately, Way Kuripan Watershed current conditions have experienced changes in land use from undeveloped areas to developed areas which causes less water infiltration to the ground

. Instead of infiltrate to the ground, rainwater flow to the surface as runoff. Thereby it increases flood discharge. Quantifying how changes in land use affect the hydrological response at the river basin scale is a current challenge in hydrological science [1].

Research on the impact of the change of vegetation on the water balance at catchment scale has been subject to extensive observation and modelling across the world for many years [2]. There are several evidences that changes in land use have influenced the hydrological regime of various river basins. These impacts can be significant in small basins [3]. It is, however, more challenging to quantify the impact of land use change on the rainfall-runoff relations for large basins where the interactions between land use, climatic characteristics and the underlying hydrological processes are often more complex and dynamic [4].

The land use changes not only cause flooding, but also may create landslides and droughts. As mentioned above that, the land use changes have important role in watershed discharge fluctuation, it is interesting to conduct the study about the impact of land use changes on its discharge. Completed by the advance of computer program which support well for geospatial analysis, the study used Geographic Information System (GIS) as the base of the discharge analysis. The impact of land-use changes on recharge and discharge areas has been assessed using hydrological models within a Geographic Information System (GIS) framework [5]. The study was conducted to determine the impact of land use changes on Way Kuripan Watershed using geospatial analysis or often called Geographic Information Systems (GIS) so that the analysis can estimate the value of discharge based on physical parameters of land.

2. METHODS

The experiment was conducted on Way Kuripan Watershed in Bandar Lampung City. The primary data in this study was rainfall station Ground Control Points (GCPs) which were obtained using Global Positioning System (GPS). These points then plotted on the map coordinates which were overlaid to watershed map or base map.

Secondary data on the study includes: (1) a river map which was obtained by screen digitations with reference of google earth map, and (2) topographic maps to form watershed map, (3) land use maps. Land use map was based on RTRW Bandar Lampung in 2010 and RTRW Pesawaran in 2011 and (4) precipitation data. In this research, three types of analysis were done; (1) hydrologic analysis, (2) spatial data analysis, and (3) sensitivity analysis of land use by stack overlapping outcomes of thematic maps using Geographic Information Systems (GIS).

Such works of sensitivity analysis was done by first identifying the flow coefficient (C) on the land use map based on each region land use, and then calculating the area of each land use changes scenarios (A) to get the value of discharge (Q) which calculated using rational method.

3. RESULTS

Based on topographic map processing to form Way Kuripan Watershed, it was found that Way Kuripan Watershed consists of four rivers; Way Kuripan, Way Simpang Kanan, Way Simpang Kiri, and Way Betung. Overlaid by administrative map, it was found that Way Kuripan watershed pass through five districts in Bandar Lampung City, including Kemiling, Tanjung Karang Barat, Teluk Betung Utara, Teluk Betung Barat, dan Teluk Betung Selatan. Way Kuripan Watershed also passed three districts in Pesawaran, including Padang Cermin, Way Lima, dan Gedong Tataan. Way Kuripan Watershed has an area of 53.54 km^2.

Land cover data of Way Kuripan watershed was based on data from Bandar Lampung Spatial Plan 2010 and Pesawaran Spatial Plan 2011. From the establishment of land cover data, it was obtained that there were nine different types of land cover in Way Kuripan Watershed: (1) 80.15% of protected areas, (2) 0.19% tourism areas, (3) 0.02% general service areas, (4) 11.69% vacant lands, (5) 0.63% regional trade and services, (6) 0.27% government offices, (7) 6.29% residential areas, (8) 0.34% of agricultural areas, and (9) 0.42% of the area roads. The Existing land use map in Way Kuripan Watershed can be seen in Figure 1.

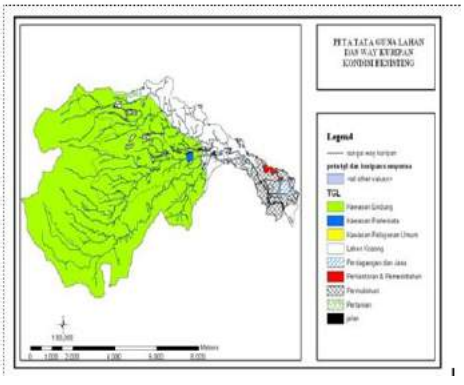

Figure. 1 Existing Way Kuripan Watershed Land Use Map

From Global Positioning System (GPS) data, rainfall station positions were plotted into Way Kuripan base map. The study areas are between rainfall stations and are fully affected by rainfall recorded by the stations.

In the study, three nearby stations rainfall data were used. Determination of rainfall station areas effecting the watershed was calculated using Thiessen Polygon Method and was done in GIS (Figure 2.). From the polygon, it was known the percentage of rainfall areas which influence at certain extent of the territories in each watershed. Rainfall intensity (I) used in the calculation is 40% of 90% rain falls within one day. Table I shows the correlation between return period (T) and rainfall intensity (I).

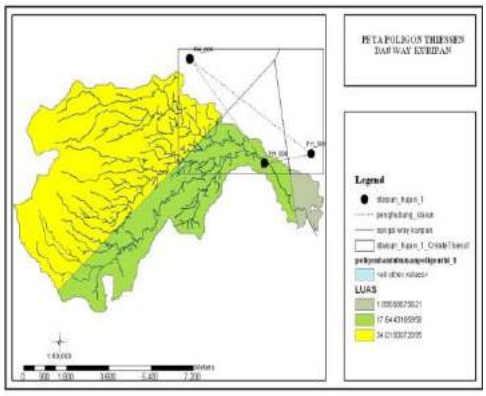

Figure. 2 Thiessen Polygon Map on GIS

TABLE I
CORRELATION BETWEEN RETURN PERIOD (T) and RAINFALL INTENSITY (I)

T	I
2	29.61
5	32.19
10	33.65
25	35.31
50	36.43
100	37.49
200	38.48

The values of peak discharge at the Way Kuripan Watershed due to changes in land use were implemented in simulations with several scenarios of land use changes (sensitivity analysis). The scenarios are: (1) Scenario I: change of 11.69% vacant land cover into the

 ISSN 2301-6590

residential areas, (2) Scenario II: changing agricultural areas 0.34% and 11.69% vacant land into an industrial areas, (3) Scenario III: changing agricultural areas 0.34% and 11.69% vacant land into an office areas and government offices, (4) Scenario IV: change most of the protected areas in Bandar Lampung at 7.12% and 11.69% of vacant land into residential areas, (5) Scenario V: change all the protected areas in Bandar Lampung (26.80%) to the residential areas and vacant lands change of 11.69% to the region and government offices, (6) Scenario VI: change all the protected areas in Bandar Lampung and most protected area in the Pesawaran district (50.54%) amounted to the residential area, then convert the vacant lands of 11.69% to the region and government offices. Figure 3 until Figure 8 shows the six scenarios done in the study. Each type of land use in Way Kuripan Watershed has different flow coefficient. The protected area has C value of 0.20; area of tourism has C value of 0.60; public service has C value of 0.70; vacant land has C value of 0.40; regional trade and services have C value of 0.80; areas and government offices have C value of 0.85; settlement area has C value of 0.65; agricultural region has C value of 0.30; industrial estate has C value of 0.70; and the roads area has C value of 0.90. The calculation of peak discharge using the rational method. The formula is:

$$Q = 0{,}278\ C\ I\ A \quad (1)$$

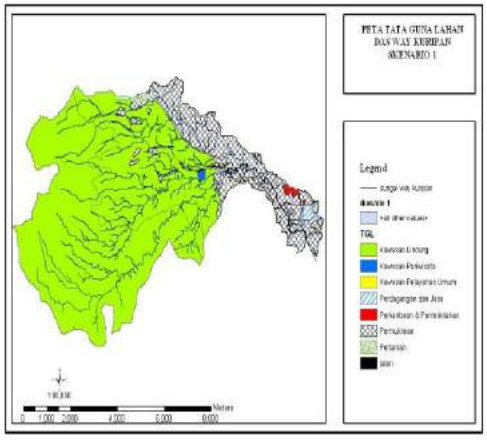

(a)

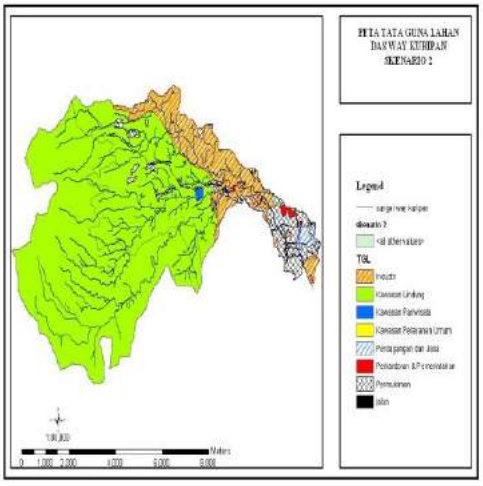

(b)

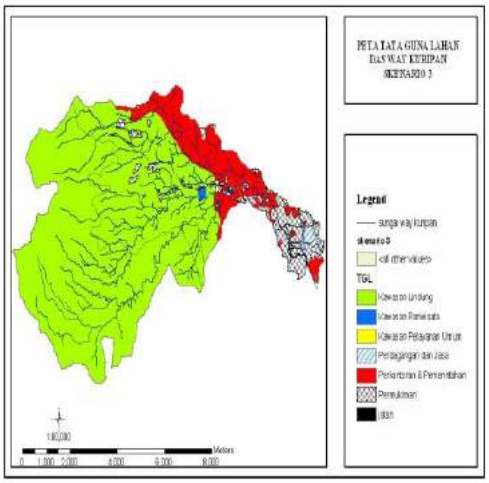

(c)

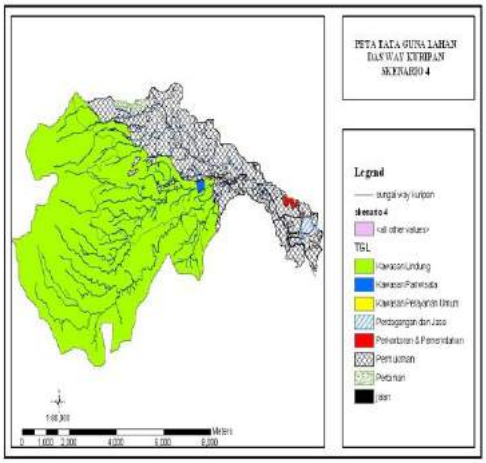

(d)

ISSN 2301-6590

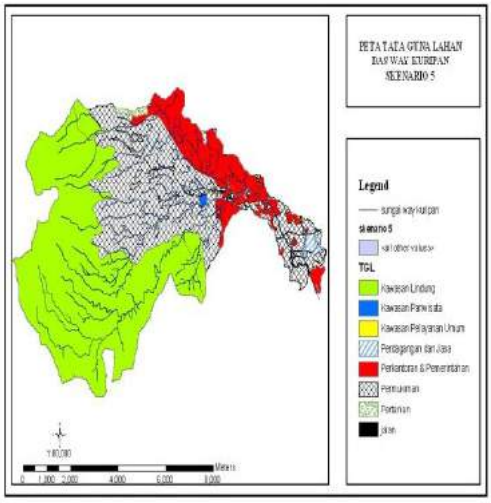

(e)

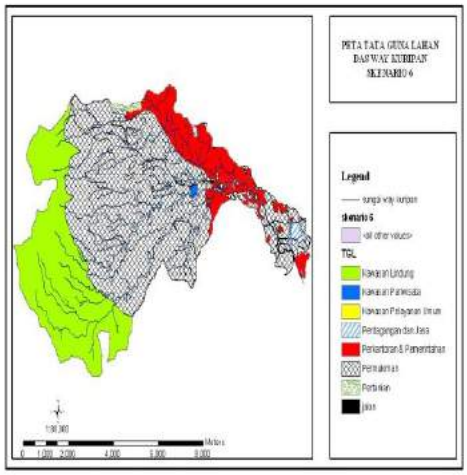

(f)

Figure 3. Scenarios of Land Use Changes of Way Kuripan Watersheds, (a) scenario 1, (b) scenario 2, (c) scenario 3, (d) scenario 4, (e) scenario 5, and (f) scenario 6

TABLE II
RECAPITULATION EFFECTS of LAND USE CHANGES for WAY KURIPAN WATERSHED DISCHARGE

T	Discharge (m^3/det)						
	Existing Condition	I	II	III	IV	V	VI
2	115,15	128,03	133,86	139,16	142,16	191,48	238,58
5	125,19	139,19	145,54	151,30	154,55	208,18	259,39
10	130,89	145,53	152,16	158,19	161,59	217,66	271,20
25	137,34	152,70	159,65	165,98	169,55	228,37	284,55
50	141,71	157,56	164,74	171,26	174,94	235,64	293,61
100	145,80	162,10	169,49	176,20	179,99	242,49	302,08
200	149,67	166,41	173,99	180,88	184,77	248,88	310,10
%	Changes	11,19	16,25	20,85	23,46	66,29	107,19

From Table 2, it was found that the presence of protected areas in the Way Kuripan watershed has very important role to reduce the peak discharge. By maintaining the existing of protected areas, it is predicted it will potential to avoid downstream flooding. In scenario 1, 2, 3, and 4 land use changes on protected areas is not significant so that the peak discharge values are not too large. It was very different from the scenarios 5 and 6, there were an extreme increase of peak discharge, due to the watershed protection in scenario 5 left only 53.35% and in scenario 6 left only 30%.

4. CONCLUSIONS

Based on hydrology analysis, it was found that the rainfall pattern of Bandar Lampung City was distributed to 40% in the first hour, 40% in the second hour, 15% in the third hour, and 5% in the fourth hour, it is very different from the pattern of rainfall by Van Breen in Java Islands.

By maintaining 80.15% of 53.54 km^2 overall Way Kuripan Watershed, it provides enough space for rain water infiltration, and may reduce the potential for flooding in the downstream area of Bandar Lampung City.

From the simulation of scenarios 1, 2, 3, and 4 in which the protected areas were maintained 80.15% of the watershed and simulation consisted the changes of: vacant land and agricultural areas function turned into residential areas, industrial areas, and the government offices. It was retrieved that peak discharge increase in

not too large values, it was between 11.19% -23.46%.

Contrary results obtained from simulations using scenarios 5 and 6 in which the protected areas on the scenario 5 of 26.80% and the protected areas on scenario 6 of 50.54%, its function transformed to be a region settlements. And it was obtained an increase of extreme peak discharge. In scenario 5 it increases by 66.29% and in scenario 6 around 107.19%. It can be concluded that the existence of protected areas is important to minimize flooding in the Way Kuripan watershed.

Using GIS in geospatial analysis of land use changes on Way Kuripan watershed make the system analysis process becomes more effective, efficient, and easy to understand.

5. References

Ashagrie, A.G., De Laat, P.J.M.,De Wit, Tu, M., and Uhlenbrook,S. : *Detecting the influence of land use changes on discharges and floods in the Meuse River Basin.*, J. Hydrol., 10, 691-701, 2006.

McGulloch, J.S.G. and Robinson, M. : *History of forest hydrology*, J. Hydrol., 150, 189–216, 1993.

Jones, J.A., and Grant, G.E. : *Peak flow responses to clear-cutting and roads in small and large basins.*, western cascades., Oregon., Water Resour. Res., 32 (4), 956-974, 1996.

Uhlenbrook, S., Mc Donnell, J., and Leibundgut, C. : Foreword to the special issue : Runoff generation and implications for river basin modeling., Freiburger Schriffen zur Hydrology., 13,4-13, 2001.

De Smedt, F. and Batelaan, O. : *The impact of land-use changes on the groundwater in the grote nete river basin, Belgium.*, Proceedings of the conference future of groundwater resources, Ed. L.Ri beiro, Lisbon., pp. 151-158, 2001

universitas
bandar lampung

Jl. Z.A. Pagar Alam No.26 Labuhan Ratu
Bandar Lampung 35142 Phone: +62 721 701463
www.ubl.ac.id
Lampung - Indonesia